

Fast Foam!™

Foam Spray System for Instrument Tray
or Instrument Channels

Sterile processors today are under pressure to increase workflow while achieving higher marks for cleanliness of surgical instruments. Knight has designed a system that quickly and easily coats external and internal instrument surfaces with our Ecozyme Foam Spray at Point-of-Use to manual clean before bioburden has a chance to harden.

Fast Foam includes 2 wand applicators for use with instrument trays and instrument channels. The unique channel wand delivers foam into hard-to-reach instrument channels to start the pre-cleaning process. This automatic detergent delivery system produces enough foam to cover an entire tray of instruments in seconds!



Inject Foam into
Instrument Channel

Durable, Lightweight
Foam Applicator Wand

Quiet and Reliable
Operation

Adjustable Wet/
Dry Foam Quality

Eliminates Manual
Pumping Associated with
Trigger Sprayers


Shortens Manual
Cleaning Effort

Fast Foam Coverage
for Instruments
in the Tray

Tray or Instrument
Channel Mode

Simple and Easy
Application

Foam injection into instrument channels

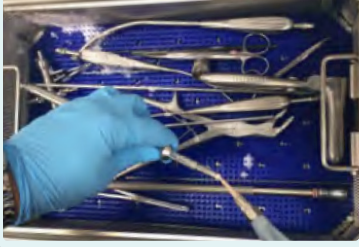

Wand trigger is ergonomically designed for operator comfort



Foam applicator discharge tube spreads EcoZyme Foam quickly and evenly across instrument tray



Fast Foam can be wall mounted at an instrument pre-treatment station or securely attached to any IV stand making the system completely mobile.




Precise, Reliable Detergent Metering

Reliable variable speed peristaltic pump delivers foaming concentrate over a wide range to produce rich, thick, long lasting foam.




Advanced Microcontroller

Electronic controls manage foam production to the precise volume and concentration needed. Password protection prevents unauthorized users from tampering with settings.



Foam Quality Adjustments

100% digital control of the amount of concentrate and the texture of the foam (wet/dry) for instrument trays and instrument channels are a patented function of this highly effective system. Once programmed there is no need to adjust it.



Safe and Simple Operation

Fast Foam operates on 24 volts and can be powered by a wall outlet or lithium-ion battery.



Product Specifications and Codes

SPECIFICATION

DESCRIPTION

Dimensions 11 in (H) x 9.5 in (W) x 7 in (D)
28 cm x 24 cm x 18 cm

Fast Foam Product Code **7260020**

Case Rating 304 Stainless Steel

Dosing Pump Rate 10–250 ml/min.

Power Supply/ Voltage **CE** **cUL** **us** In: 100–250 Volts AC, 1.4–0.7A, 50–60 Hz
Out: 24 Volts DC 2.5A

Chemical Compatibility— Dose Pump Industry standard detergents

EcoZyme Foam Product Code **18560-Foam-04, 1 gal., 4/Box**

Unit Weight 14 lbs, 6.4 kg with foam wands

Foam Wand Length/ Material 13 in (33 cm), ABS, PP, POM

Suction/Discharge Tube Length 8ft (243.84 cm) single lobe tube (suction)
(2) 8ft (243.84 cm) dual lobe tube (discharge)

Approvals (Pending) **CE** **cUL** **us** CAN/CSA-C22.2 No. 610110-1-12
UL Std. No. 61010-1 (3rd Edition)
EN 61010-1:2010 (3rd Edition)



Distributed by:
Southmedic Inc.
50 Alliance Blvd.,
Barrie, ON Canada L4M 5K3
www.southmedic.com

Email: custserv@southmedic.com
1-800-463-7146 Toll free in North America